


1026 SERIES**SIZE EN2~6**

Fitted with standard arm

Max. door width (mm)	850 - 1400
Max. door weight (kg)	40 - 120
Max. opening angle	180°

**DIMENSIONS**

A	B	C	D	E	F
296	60	48.3	50	45	45

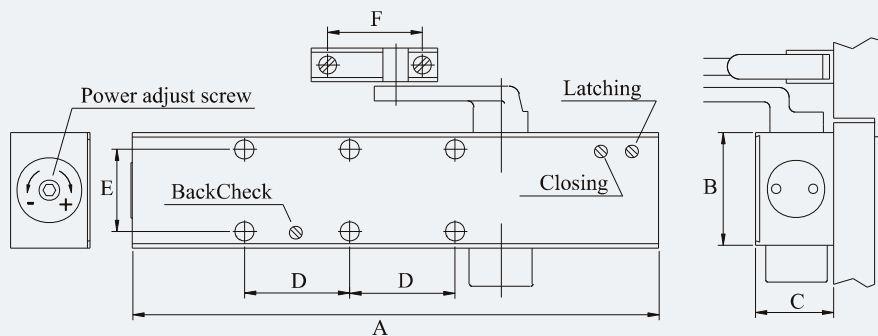

1026 Series

1026 Series surface mounted door closer is a heavy duty, high end unit offering multi-functional operation suitable for most common doors in architectural and commercial applications.

Standard Features

- Closing force power adjustable (EN2-6)
- A single closer provides variable power sizes
- Adjustable closing speed and latching speed
 - Closing speed action (180°~15°)
 - Latching speed action (15°~0°)
- Non-handed installation
- Compact extruded aluminium body design with minimal projection allowing installation to door with adjacent wall at 90°
- Back check - beyond approx 60° (valve adjustable)
- Delayed action - between 180° and 65°
- Parallel arm bracket supplied as standard

- Standard hold open arm - available as accessory
- Slide track (inc. hold open) - available as accessory
- Fixing screws supplied to suit timber or metal fixing
- Drop plate and inverted mount plate available as accessories
- Stainless steel box cover - available as accessory

Fire Rating

1026 Series door closer has been successfully tested on fire door assemblies in accordance with Australian Standard AS1905 Part 1: Fire Resistant Door sets.

EN1154**FIRE RATED**

PRODUCT CODE	FINISH	DESCRIPTION
1026SIL	SIL	Door closer EN2-6 inc. standard arm and PA bracket - no box cover
1026CSSS	SSS	Door closer EN2-6 inc. standard arm and PA bracket plus box cover
1026CPSS	PSS	Door closer EN2-6 inc. standard arm and PA bracket plus box cover