


9024 SERIES**SIZE EN2~4**

Fitted with standard arm

Max. door width (mm)	850 - 1100
Max. door weight (kg)	40 - 80
Max. opening angle	180°

**DIMENSIONS**

A	B	C	D	E	F
236	60	38.5	50	43	45

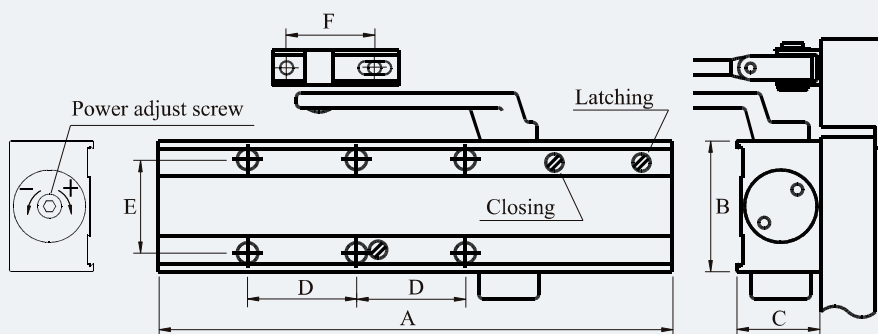

9024 Series

9024 Series surface mounted door closer is a high end unit offering multi-functional operation suitable for most common doors in architectural and commercial applications.

Standard Features

- Closing force power adjustable (EN2-4)
- A single closer provides variable power sizes
- Adjustable closing speed and latching speed
- - Closing speed action (180°~15°)
- - Latching speed action (15°~0°)
- Non-handed installation
- Compact extruded aluminium body design with minimal projection allowing installation to door with adjacent wall at 90°
- Back check - beyond approx 60° (valve adjustable)
- Delayed action - between 180° and 65°
- Parallel arm bracket supplied as standard

- Standard hold open arm - available as accessory
- Slide track (inc. hold open) - available as accessory
- Fixing screws supplied to suit timber or metal fixing
- Drop plate and inverted mount plate - available as accessories
- Stainless steel box cover - available as accessory

Fire Rating

9024 Series door closer has been successfully tested on fire door assemblies in accordance with Australian Standard AS1905 Part 1: Fire Resistant Door sets.

EN1154

FIRE RATED



PRODUCT CODE	FINISH	DESCRIPTION
9024SIL	SIL	Door closer EN2-4 inc. standard arm and PA bracket
9024CSSS	SSS	Door closer EN2-4 inc. box cover, standard arm and PA bracket
9024CPSS	PSS	Door closer EN2-4 inc. box cover, standard arm and PA bracket


9025 SERIES **SIZE EN2~5**

Fitted with standard arm

Max. door width (mm)	850 - 1250
Max. door weight (kg)	40 - 100
Max. opening angle	180°

**DIMENSIONS**

A	B	C	D	E	F
236	60	38.5	50	43	45

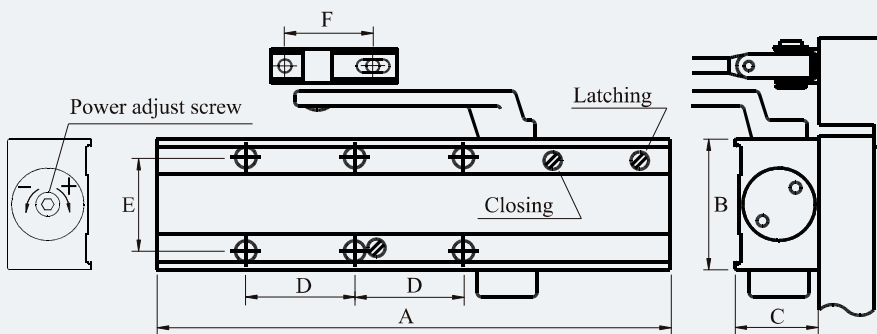

9025 Series

9025 Series surface mounted door closer is a high end unit offering multi-functional operation suitable for most common doors in architectural and commercial applications.

Standard Features

- Closing force power adjustable (EN2-5)
- A single closer provides variable power sizes
- Adjustable closing speed and latching speed
 - Closing speed action (180°~15°)
 - Latching speed action (15°~0°)
- Non-handed installation
- Compact extruded aluminium body design with minimal projection allowing installation to door with adjacent wall at 90°
- Back check - beyond approx 60° (valve adjustable)
- Delayed action - between 180° and 65°
- Parallel arm bracket supplied as standard

- Standard hold open arm - available as accessory
- Slide track (inc. hold open) - available as accessory
- Fixing screws supplied to suit timber or metal fixing
- Drop plate and inverted mount plate - available as accessories
- Stainless steel box cover - available as accessory

Fire Rating

9025 Series door closer has been successfully tested on fire door assemblies in accordance with Australian Standard AS1905 Part 1: Fire Resistant Door sets.

EN1154**FIRE RATED**

PRODUCT CODE	FINISH	DESCRIPTION
9025SIL	SIL	Door closer EN2-5 inc. standard arm and PA bracket - no box cover
9025CSSS	SSS	Door closer EN2-5 inc. standard arm and PA bracket plus box cover
9025CPSS	PSS	Door closer EN2-5 inc. standard arm and PA bracket plus box cover


9026 SERIES	SIZE 2 - 5
Fitted with standard arm	
Max. door width (mm)	850 - 1250
Max. door weight (kg)	40 - 100
Max. opening angle	180°



Shown with optional SSS box cover

DIMENSIONS

A	B	C	D	E	F
275	62	45	50	43	45

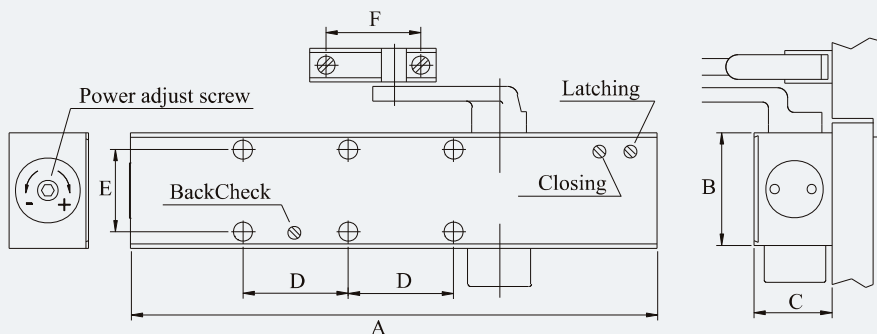

9026 Series

9026 Series surface mounted door closer is a general-purpose commercial grade door closer with a range of optional features designed for projects where aesthetics and economy are required.

Standard Features

- Aluminium extruded body
- Closing force power adjustable (2-5)
- Adjustable closing speed and latching speed
- Adjustable delayed action
- Non handed
- Standard arm with hold open available as accessory
- Parallel arm bracket supplied as standard

Fire Rating

9026 Series door closer has been successfully tested on fire door assemblies in accordance with Australian Standard AS1905 Part 1: Fire Resistant Door sets.



PRODUCT CODE	FINISH	DESCRIPTION
9026SIL	SIL	Door closer supplied with standard arm and PA bracket
9026CSSS	SSS	Door closer supplied with standard arm and PA bracket and SSS box cover
9026CPSS	PSS	Door closer supplied with standard arm and PA bracket and PSS box cover