

# 7726SRDA Series Premium Range Surface Mounted Door Closer



The Lockwood Rack & Pinion Slide Arm Series provides for a cleaner, more aesthetic appearance on the door whilst utilizing the same robust features and benefits of Rack and Pinion functionality.

## Specifications

<b>Power</b>	EN adjustable 2 to 6.
<b>Back check (BC)</b>	Adjustable.
<b>Hold Open</b>	Adjustable. Hold-open can be set at any angle up to 130° of opening.
<b>Handing</b>	Non-handed. Suitable for left or right hand doors.
<b>Cover</b>	Fully formed metal.
<b>Materials</b>	Extruded aluminium body manufactured from high-performance silicon alloy.
<b>Mechanism</b>	Rack and pinion design.
<b>Mounting</b>	Regular, parallel and over-door mounting.
<b>Valves</b>	Adjustable closing and latching speed valves with overload protection.
<b>Delayed Action</b>	Adjustable.

## Ordering Information

Model	Part Numbers	Finishes
<b>Slide Arm</b>	7726SRDASSS	Satin Stainless Steel
	7726SRDAPSS	Polished Stainless Steel
	7726SRDASIL	Silver

Other finishes available on request

## Standards and Compliance



The Lockwood 7726SRDA series closer has been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS1905.1:2005, Part: Fire Resistant Door sets.

Note: Hold open option is not approved on any fire door.

**NOTE:** Slide Rail installation may result in a spring strength loss of up to 30% in most cases. Please consider the application and usage of the door prior to selecting the appropriate door control.


# 7726SRDA Series Premium Range Surface Mounted Door Closer

## 7726SRDA Slide Arm Pull Side

### Part Numbers

7726SRDA

Closer installed on pull side of door. This mounting position permits opening of 130°.

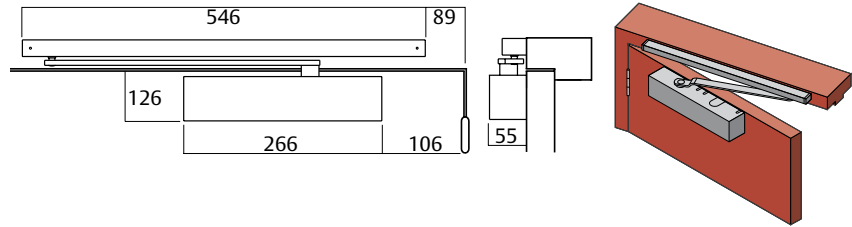


## 7726SRDA Slide Arm Push Side

### Part Numbers

7726SRDA

Closer installed on push side of door. This mounting position permits opening of 130°.

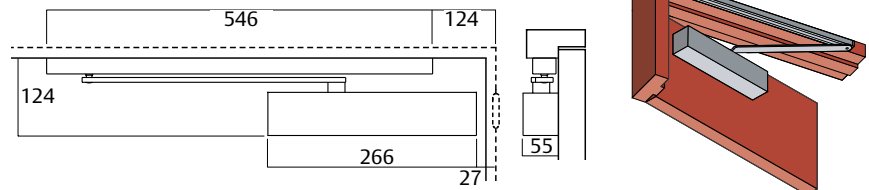

## 7726SRDA Slide Arm Over Door Mounting Push Side

### Part Numbers

7726SRDA

Closer installed on push side of door and top rail where conditions do not allow parallel mounting. This mounting position permits opening of 130°.

