# **Commercial Mortice Locks**

# Synergy 3571 Deadbolts



Various deadlocking functions operated generally by a key outside and by a turnknob or key inside. Locked by key or turnknob when the door is closed.

For all deadlock functions specify primary lock (3571SC). This lock can then be easily adapted to suit function required.

### **Features and Specifications**

### **Bolt**

19mm stainless steel bolt.

### **Furniture**

Compatible with most Lockwood cylinder escutcheons, turnknobs and plate furniture. Refer to lockweb.com.au for further details.

### Backset

60mm standard backset 89 and 127mm extended backsets available on application.

### **Standard Finishes**


Satin Chrome Brushed SC Chrome Plate CP Polished Brass PB

Other finishes on application.

Part number	3571	4571	5571
Dimension A	60	89	127
Dimension B	84	113	151



### **Dimensions**

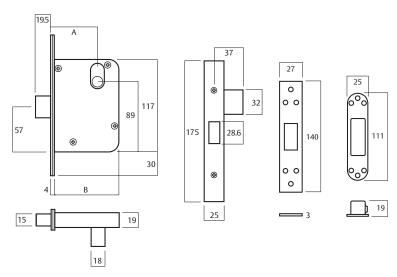

# **Mechanical Locking Solutions**

## **Commercial Mortice Locks**

# Synergy 3571 Deadlbolts



### **Cylinder and Turn Deadbolt**

### Cylinder and Turnknob. Reversible.

3571W/I

**Outside:** Locked or unlocked by key. **Inside:** Locked or unlocked by turnknob.

### **Double Cylinder Deadbolt**

### Double Cylinder. Reversible.

3571YY

**Outside:** Locked or unlocked by key. **Inside:** Locked or unlocked by key.

### **Exit Door Deadbolt**

### Turnknob Inside. Reversible.

3571-T

Inside: Locked or unlocked by turnknob.

### **Single Cylinder Deadlock**

### Single Cylinder. Reversible.

3571Y

Lockset may be installed with cylinder either inside or outside.

Outside/Inside: Locked or unlocked by key.

### **Escape Deadlock**

### Cylinder and Escape Lever.

Left hand	3571DEL
Right hand	3571DER

Outside: Locked or unlocked by key.

**Inside:** Unlocked only by escape turn. Inside turn will not lock door.

### **Through Fix Privacy Deadlock**

# Emergency Turnknob Escutcheon. Turnknob. Reversible.

3571PT

**Outside:** Operated by coin or screwdriver in emergency situation by operating the slotted emergency turn button. **Inside:** Locked or unlocked by turn knob.

